

DSL-302G



**150X Faster
Than Analog
Modems!**

- Plug & Play USB Installation
- Flexible Fast Ethernet or USB Connectivity
- Supports 2 Computers Simultaneously
- Wide Range of DSLAM Interoperability

ADSL Combo Modem

D-Link, a worldwide leader in networking products, introduces the new DSL-302G, a newly designed ADSL Modem that provides both USB and Ethernet connectivity at an affordable price.

The DSL-302G uses ADSL (Asymmetric Digital Subscriber Line) technology to bring you Internet connection speeds up to 150 times faster than a 56K analog modem over a standard phone line.

Two computers can simultaneously connect to the DSL-302G through its USB and Ethernet port to share its high-speed Internet connection. You can connect to its Ethernet port regardless of the operating system you are using, or connect to its USB port to allow easy installation to a USB equipped computer running Windows 98SE, Me, 2K, XP, or Mac OS 9 and OS X.

The modem comes with a simple configuration tool and a web-based Graphical User Interface (GUI)

that allows you to easily modify settings to connect to an Internet Service Provider (ISP). Connection speed, traffic statistics and other detailed information are displayed.

The DSL-302G supports Static IP, Dynamic IP, as well as PPPoE connections terminating on the local PCs. The DSL-302G supports all applications such as video games and VPN connections with no configuration needed on the modem.

The DSL-302G is easily upgradeable in the field, making it future-proof for both end-users and service providers.

The DSL-302G is a great all-around solution that will satisfy your needs, whether you're a home user who requires high-speed Internet access for faster web surfing or quicker downloads, or a small business that depends on the Internet to conduct daily business.



ADSL Combo Modem

SPECIFICATIONS

Hardware Features

- RJ-11 port for ADSL Connection
- USB 1.1 (B-Connector)
- RJ-45 port for 10/100 BaseT Ethernet Connection

Diagnostic LEDs Indicator

- Power
- ADSL/Ethernet/USB Activity
- Network Status

Software Features

Dynamic Learning
(Up to 4096 addresses)

Management

- Windows Software Management
- HTTP Web Management

Standards

- ANSI T1.413 issue 2
- ITU G.992.1 (G.dmt)
- ITU G.992.2 (G.lite)
- ITU G.994.1 (G.hs)

Data Rates

- DMT full rate downstream (up to 8Mbps)
- DMT full rate downstream (up to 640Kbps)
- G.lite ADSL downstream (up to 1.5Mbps)
- G.lite ADSL upstream (up to 512Kbps)

USB Support

Minimum Requirements

- Mac OS 9, OS X
- Windows XP, Windows 2000, Windows Me, Windows 98, Windows 98SE
- Pentium 166Mhz or faster

Ethernet Support

Minimum Requirements

- Operating System Independent (works with Windows, Linux, UNIX, and Macintosh)
- Ethernet (NIC) Network Interface Card/Port

Certifications

- FCC Part 15 Class B
- FCC Part 68
- IEC 60950
- CSA 950/US
- CE Mark
- UL 1950 3rd Ed

Power Adapter

Output: 9V AC 1A

Operating Temperature

0° to 50°C
(32 to 122 degrees Fahrenheit)

Dimensions


142mm x 109mm x 31mm
(5.6in x 4.3in x 1.22in)

Weight

0.21 kg (7.4 oz)



DSL-302G

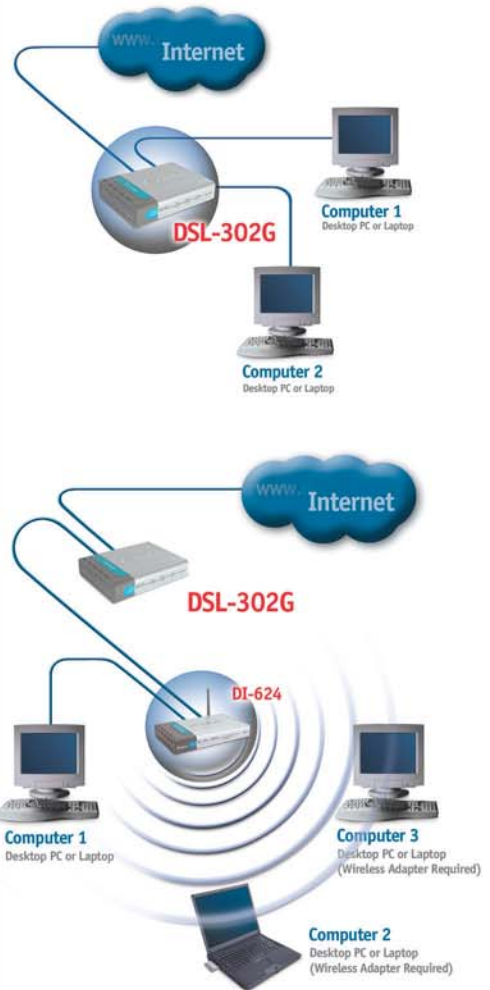

*Share Your High-Speed
Internet Connection*



D-Link Systems, Inc. 17595 Mt. Hermann Fountain Valley CA 92708-4160 www.dlink.com
©Copyright D-Link Systems, Inc. 2003. All rights reserved. D-Link® is a registered trademark of D-Link Systems, Inc.
Other trademarks or registered trademarks are the property of their respective manufacturers or owners.
Price and specifications are subject to changes without notice. See inside package for warranty details.
* 24/7 Tech Support is available only in USA.

D-Link®
Building Networks for People