




d) ping G → C (Hub)
 e) TRACEROUTE D → E (S1)
 R2
 Red/Mac R.S INT
 0.0.0.0/0 R1,2 2
 R1
 0.0.0.0/0 R2,2 2

	MAC _D	MAC _A	IP _D	IP _A	PROTO	CAMPOS INTERES
①	MACD MAC R2,1	FF:FF:-- MACD MAC R2,1	-- IPD	-- IPE	ARP UDP	REQ. IP R2,1 REQ. MAC R2,1 TTL = 1
②	MAC R2,1	MACD	IP R2,1	IPD	ICMP	ERROR TTL EXCEEDED
③	MACD	MAC R2,1	IPD	IPE	UDP	TTL = 2
④	MAC R2,1	MACD	IP R1,2	IPD	ICMP	ERROR TTL EXC.
5	MACD MAC R1,1 MAC R2,	MAC R2,1 FF:-- MACD	IPD -- IPE	IPE -- IPD	UDP ARP ICMP	TTL = 3 REQ IPE ERROR PORT UNREACH.

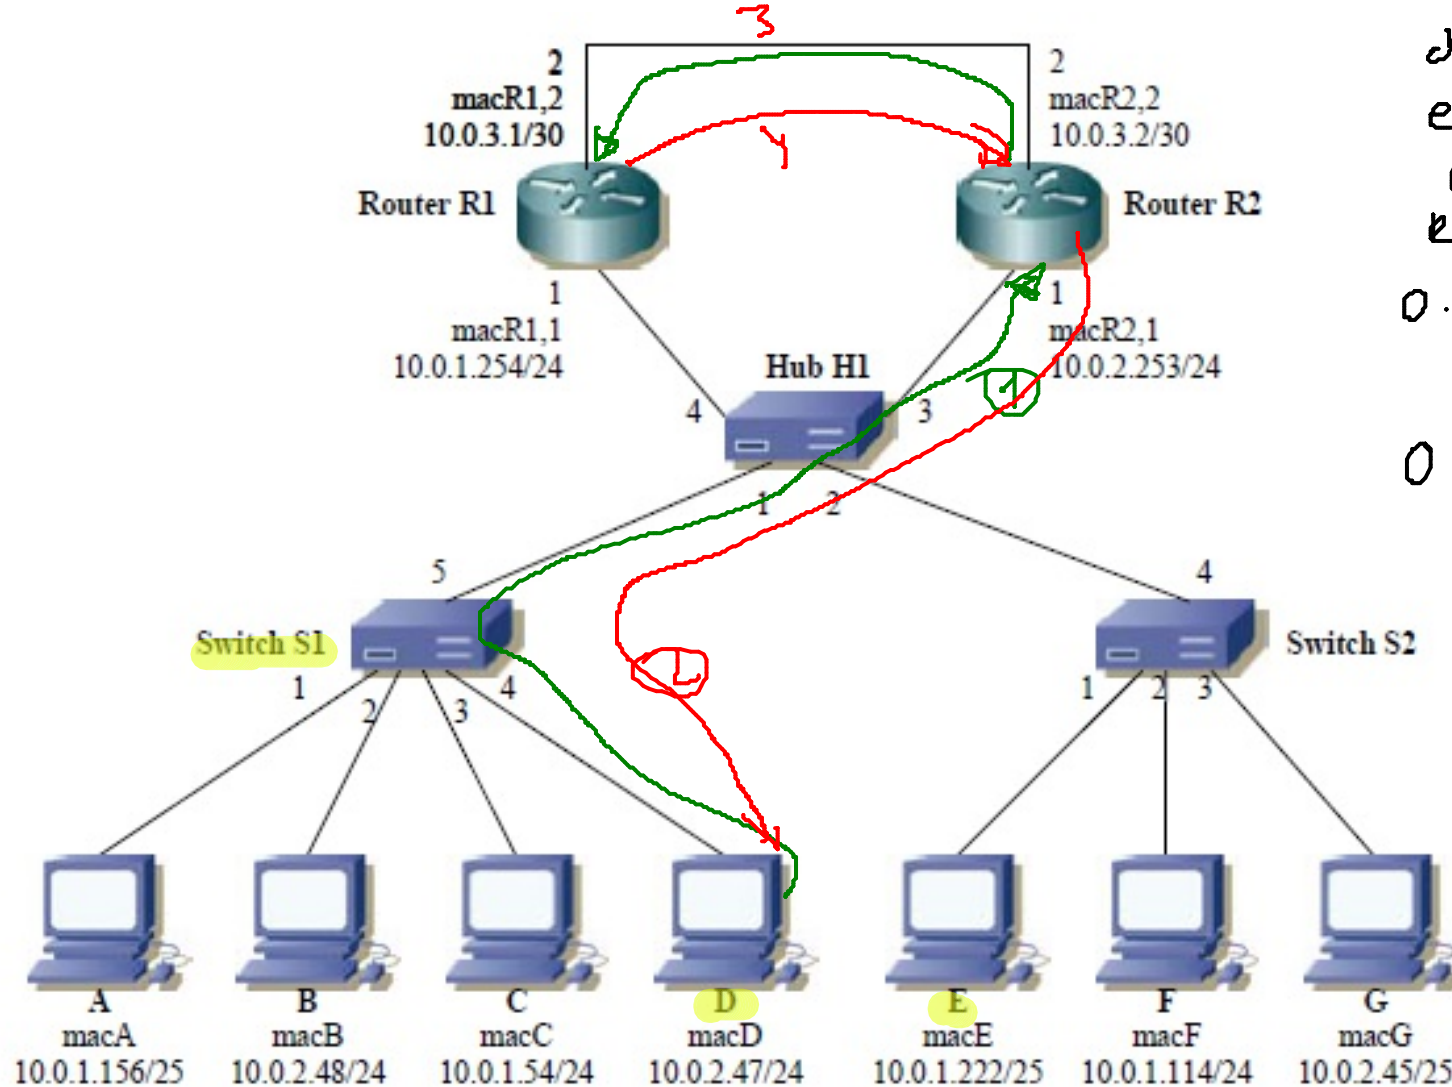