

Nº
paq.

1	17.077761	130.206.169.222.1244	>	169.229.131.109.http: S 3155219005:3155219005(0) win 5840 <mss 1460 >
2	20.077783	130.206.169.222.1244	>	169.229.131.109.http: S 3155219005:3155219005(0) win 5840 <mss 1460 >
3	20.300796	169.229.131.109.http	>	130.206.169.222.1244: S 715589519:715589519(0) ack 3155219006 win 32850 <mss 132
4	20.300902	130.206.169.222.1244	>	169.229.131.109.http: . ack 1 win 5840
5	20.301301	130.206.169.222.1244	>	169.229.131.109.http: P 1:114(113) ack 1 win 5840
6	20.523803	169.229.131.109.http	>	130.206.169.222.1244: . ack 114 win 32850
7	20.529210	169.229.131.109.http	>	130.206.169.222.1244: . 1:1315(1314) ack 114 win 32850
8	20.529284	130.206.169.222.1244	>	169.229.131.109.http: . ack 1315 win 7884
9	20.530337	169.229.131.109.http	>	130.206.169.222.1244: P 2629:3943(1314) ack 114 win 32850
10	20.530437	130.206.169.222.1244	>	169.229.131.109.http: . ack 1315 win 7884
11	20.753019	169.229.131.109.http	>	130.206.169.222.1244: . 3943:4307(364) ack 114 win 32850
12	20.753118	130.206.169.222.1244	>	169.229.131.109.http: . ack 1315 win 7884
13	20.754520	169.229.131.109.http	>	130.206.169.222.1244: . 4307:5621(1314) ack 114 win 32850
14	20.754595	130.206.169.222.1244	>	169.229.131.109.http: . ack 1315 win 7884
15	20.978778	169.229.131.109.http	>	130.206.169.222.1244: . 1315:2629(1314) ack 114 win 32850
16	20.978885	130.206.169.222.1244	>	169.229.131.109.http: . ack 5621 win 10512
17	20.979898	169.229.131.109.http	>	130.206.169.222.1244: . 5621:6935(1314) ack 114 win 32850
18	20.979985	130.206.169.222.1244	>	169.229.131.109.http: . ack 6935 win 14454


①

win = WR

CONTROL FLUID

↓

DIFFER



①


win = WR

CONTROL FLUID

↓


BUFFER

VENTANA RECEPCION = win X - campo cab. TCP

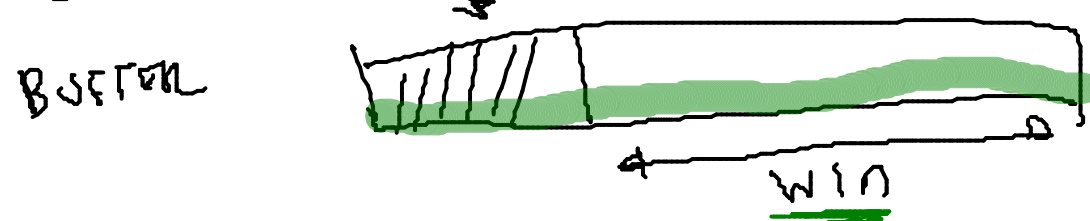
$$\text{RTT} \times \text{BW} = \text{WINDOW} = \underline{4.46 \text{ Kbytes}}$$

" " " BUFFER

$\frac{223 \text{ ms}}{20 \text{ Kbytes/s}}$

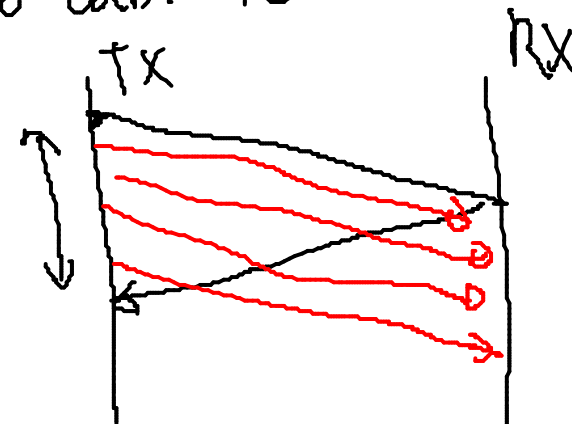

②
cwnd
CONTROL CONG
 $\min(cwnd, WR)$